

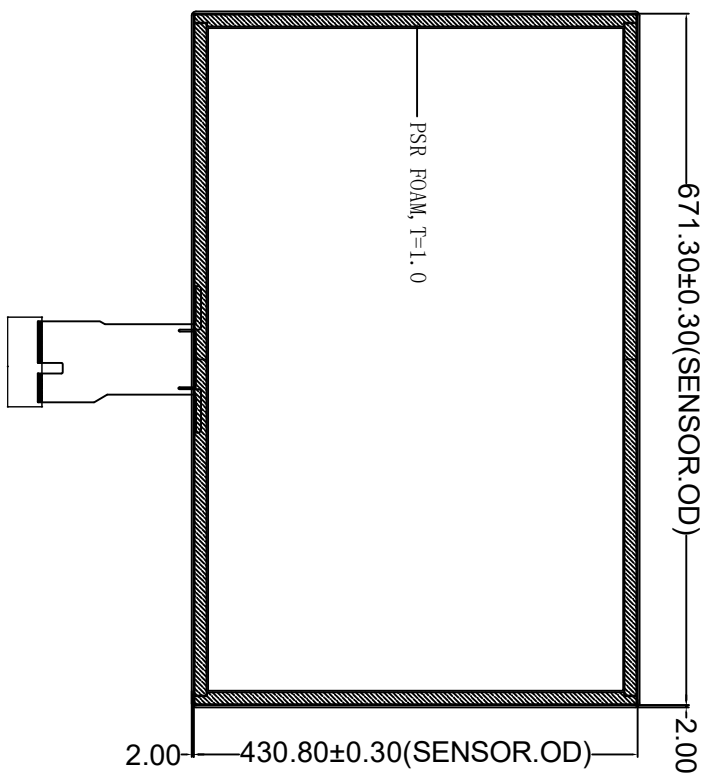
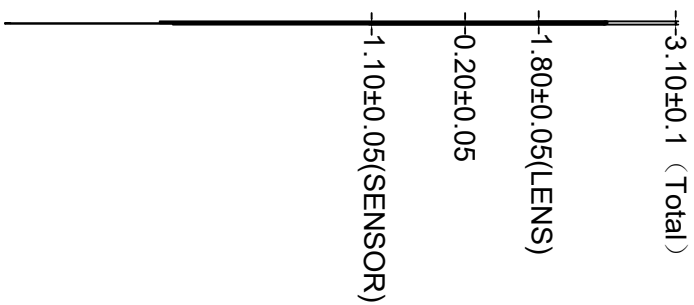


No ROHS hazardous material

Ordinal	Modify content description	Cartographer/date of change
Δ		
Δ		

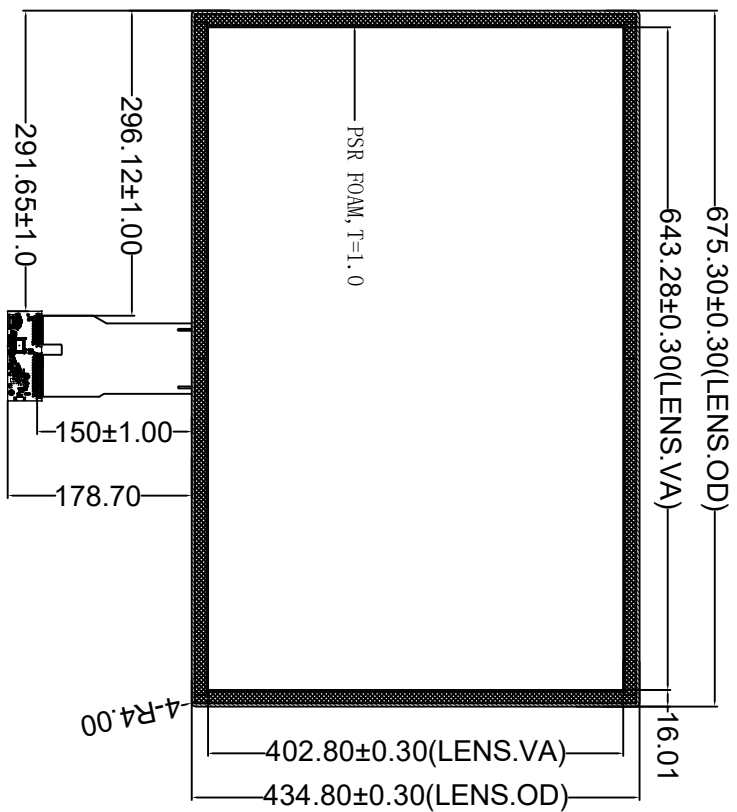

Screen printing area: Print Black



PSR FOAM area :T= 1 MM

USB Connector (CONS)	
1	VCC (5V)
2	DN
3	DP
4	GND


Front view

Side view

Back view

Technical parameters

1. Interfaces:	USB	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC Solutions:	II L12312	9. Surface hardness:	≥6H
4. Impact Resistances:	30,000JL Steel ball 1/328 Weight Hammer Test	10. Operate :	-20°C~+70°C, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30°C~+80°C, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance	as±0.5

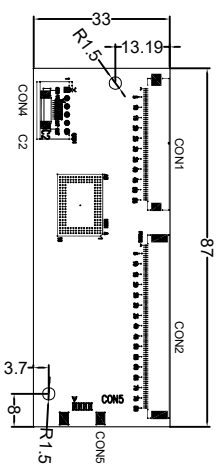

杭州宏梟科技有限公司  
GraHowlet Technology CO., Ltd

Model	HX3001701		View Direction		Unit	MM	
Version	V1.0	Designer	LU0	Date	2017-4-11	Edition	A1
Customer		Approved	HBZ	Date	2017-4-11	Proportion	1:1