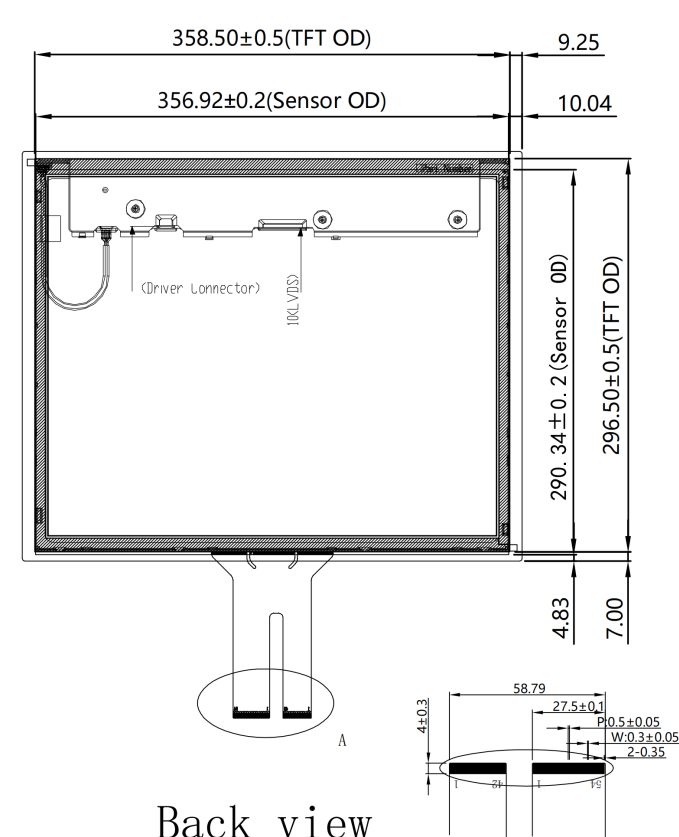


Ordinal	Modify content description	Cartographer	Date of change
①			
②			


$$A'' : A = 2 : 1$$

USB Connector (J1)	
1	VCC(5V)
2	DN
3	DP
4	GND

Front view

Side view

Back view

Technical parameters			
1. Interfaces:	USB	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC solutions:	ILI2302M	9. Surface hardness:	≥6H
4. Impact resistance:	30.0ΦDIA.Steel Ball/ 132g/Height=35cm/time	10. Operate :	-20℃~+70℃, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30℃~+80℃, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance as ±0.5	

TFTC G170EG01 V1) PIN:											
CN2										CN1	
1	2	3	4	5	6	7	8	9	10	1	VCC
RX2IN-	RX2IN+	RX2IN-	RX2IN+	RX2IN-	RX2IN+	GND	RX2CLKIN-	RX2CLKIN+	RX2IN-	2	VCC
11	12	13	14	15	16	17	18	19	20	3	GND
RX2IN+	RX2IN-	RX2IN+	GND	RX2IN-	RX2IN+	GND	RX2IN-	RX2IN+	RX2CLKIN-	4	GND
21	22	23	24	25	26	27	28	29	30	5	DISPLAY
RX2CLKIN+	RX2IN-	RX2IN+	GND	GND	NC	GND	VCC	VCC	VCC	6	DIMMING

		杭州宏臬科技有限公司 GraHowlet Technology CO.,Ltd					
Model	HX1701702			view direction		Unit	MM
Version	V1.0	Designer	LUO	Date	2017-12-12	Edition	A1
Customer		Approved	HBZ	Date	2017-12-13	Proportion	1:1